

01-31-00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Hirokazu Yashiro et al.

Serial No.: Unknown

Examiner: Unknown

Filing Date: January 28, 2000

Group Art Unit: Unknown

For: MOTOR AND TURBO-MOLECULAR PUMP

Docket No.: 1018.1117101

TRANSMITTAL SHEET

The Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

CERTIFICATE UNDER 37 C.F.R. 1.10: The undersigned hereby certifies that this paper or papers, as described herein, are being deposited in the United States Postal Service, "Express Mail Post Office to Addressee" having an Express Mail mailing label number of: EL531629832US, in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C., 20231 on this 28th day of January, 2000.

By Kathleen L. Bockley
Kathleen L. Bockley

We are transmitting herewith the attached Patent Application including the following:

[XX] THIRTY-THREE (33) sheet(s) of specification.

[XX] TWENTY-SEVEN (27) claim(s).

[XX] ONE (1) sheet(s) of Abstract.

[XX] SIX (6) sheet(s) of formal drawings.

[XX] Unexecuted Declaration and Power of Attorney.

[] A verified statement(s) to establish small entity status under 37 C.F.R. 1.9 and/or 1.27 is enclosed.

[] An Assignment of the invention to _____ is being filed contemporaneous with this patent application.

[XX] A certified copy of a Japanese application, serial no. 11-022012, filed January 29, 1999, and a Japanese application, serial no. 11-0228383, filed February 5, 1999, the right of priority of which is claimed under 35 U.S.C. 119.

003210-EB5E5460


CLAIMS AS FILED						
	(1)	(2)	SMALL ENTITY		OTHER	
FOR:	# FILED	# EXTRA	Rate	Fee	Rate	Fee
BASIC FEE	1			\$345		\$690
TOTAL CLAIMS	27-20 =	7	X9=	\$	X18=	\$126
INDEPENDENT CLAIMS	5-3 =	2	X39=	\$	X78=	\$156
() MULTIPLE DEPENDENT CLAIM PRESENTED			+130=	\$	+260=	\$0
TOTAL			\$		\$972.00	

*If the difference in Column (1) is less than zero, enter "0" in Column 2.

[] Other _____

[XX] A check in the amount of \$972.00 is enclosed.

[XXX] Please charge any deficiencies or credit any overpayment in the enclosed fees to Deposit Account No. 50-0413.

By: 
Brian N. Tufte

Reg. No. 38,638

Brian N. Tufte
CROMPTON, SEAGER & TUFTE, LLC
331 Second Avenue South, Suite 895
Minneapolis, Minnesota 55401-2246
Telephone: (612) 677-9050
Facsimile: (612) 359-9349

MOTOR AND TURBO-MOLECULAR PUMP

BACKGROUND OF THE INVENTION

The present invention relates to a motor and a turbo-molecular pump.

5 A turbo-molecular pump produces an ultra-high vacuum state and is employed in, for example, semiconductor fabrication related apparatuses (e.g., sputtering apparatuses, chemical vapor deposition (CVD) apparatuses, and etching apparatuses) and measuring apparatuses (e.g.,
10 electron microscopes, surface analysis apparatuses, and environment testing apparatuses). A typical turbo-molecular pump includes a motor and a plurality of rotor vanes rotated by the motor. The rotor vanes are rotated to produce a molecular flow and discharge gases. This causes an ultra-high vacuum state in the interior of the apparatus connected
15 to the turbo-molecular pump.

The motor has a rotary shaft that is rotated at a high speed to produce the ultra-high vacuum state. The bearing that supports the rotary shaft must thus be capable of high
20 speed rotation. A ball bearing, which requires lubricating oil, is not appropriate for such application. This is because the vapor pressure of the lubricating oil, although low, hinders depressurization to the ultra-vacuum state by the turbo-molecular pump. Further, vaporized lubricating
25 oil contaminates vacuum chambers.

Japanese Unexamined Utility Model Publication No. 63-14894 and Japanese Unexamined Patent Publication No. 2-16389 describes a turbo-molecular pump that does not use lubricating oil. This turbo-molecular pump employs non-

contact bearings, such as air bearings or magnetic bearings.

A kinetic air bearing is one example of an air bearing. This air bearing has a fixed cylinder and a rotatable cylinder, which is arranged in the fixed cylinder. A bearing area and a seal area are defined on the outer surface of the rotatable cylinder. A plurality of dynamic pressure grooves extend along the bearing area. A predetermined clearance is provided between the outer surface of the rotatable cylinder and the inner surface of the fixed cylinder.

One end of the two cylinders is exposed to a predetermined vacuum atmosphere. Thus, the seal area is located near that end of the rotatable cylinder to prevent gases from moving between a compressed gas layer in the bearing and the vacuum atmosphere. A plurality of helical seal grooves extend along the seal area. An annular groove formed on the outer surface of the rotatable cylinder extends along a boundary area defined between the bearing area and the seal area. An aperture extends through the fixed cylinder at a location opposed to the annular groove. The motor drives and rotates the rotatable cylinder. The rotation causes the air outside the fixed cylinder to pass through the aperture and into the clearance (especially to the region between the bearing area and the opposed area of the fixed cylinder). This forms a pressure gas film, or the compressed gas layer, which radially supports the rotary shaft.

When the rotating speed of the rotatable cylinder is lower than a predetermined value, the rotatable cylinder slides on the fixed cylinder. Ceramics having relatively high anti-wear properties, such as alumina and zirconia, may

be used as the material of the fixed and rotatable cylinders.

When designing the turbo-molecular pump, the depressurizing capability of the motor determines the number of vanes and the motor speed. For example, the motor speed is 50,000rpm to 70,000rpm in a typical, compact turbo-molecular pump.

The viscous friction produced by air increases the temperature of the air bearing during high speed rotation. The generated heat is transferred rather easily from the outer surface of the fixed cylinder. On the other hand, since the rotatable cylinder is covered by the fixed cylinder, heat cannot be transferred from the rotatable cylinder so easily. This results in a large difference between the temperature of the fixed cylinder and the temperature of the rotatable cylinder. The coefficient of thermal expansion for ceramics, such as alumina and zirconia, is $7 \text{ to } 8 \times 10^{-6}/^{\circ}\text{C}$ and thus relatively high. Therefore, in an air bearing made of alumina or zirconia, the temperature difference between the fixed cylinder and the rotatable cylinder causes the dimension change of the fixed cylinder to differ from that of the rotatable cylinder. This varies the size of the clearance. Consequently, the rotatable cylinder may contact the fixed cylinder and obstruct high speed rotation.

A fan is often used to cool the air bearing. The fan is effective for cooling the outer part of the air bearing, or the fixed cylinder, but not for cooling the inner part, or the rotatable cylinder. Hence, the fan further increases the temperature difference between the rotatable cylinder and the fixed cylinder and changes the size of the

clearance. There is a demand for a more compact turbo-
molecular pump that operates at higher rotating speeds. In
such a pump, the size of the clearance must be decreased.
Therefore, the effects of heat on the air bearing cannot be
ignored.

To increase the speed of the motor, a bearing that has
an improved seal and improved performance is necessary. The
vibrations of the rotatable cylinder affect the supporting
characteristics of the rotatable cylinder. For example, the
depth of the dynamic pressure grooves affect the natural
frequency of the rotatable cylinder. When the natural
frequency (Hz) of the rotatable cylinder and the rotating
speed (rps) of the rotatable cylinder are about the same,
the possibility of resonance is high. Resonance causes
vibrations of the motor. Therefore, the depth of the
dynamic pressure grooves is an important factor for
obtaining improved bearing characteristics. Further, the
depth of the seal grooves affects the seal characteristics.
Hence, the depth of the seal grooves is an important factor
for obtaining a high degree of vacuum.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a
compact motor applicable to high speeds and a compact turbo-
molecular pump having a high depressurizing capability.

To achieve the above object, the present invention
provides a motor including a rotary shaft and a bearing for
radially supporting the rotary shaft. The bearing includes
a cylindrical rotary member connected to the rotary shaft,
and a cylindrical fixed surface surrounding the rotary
member. The fixed surface is spaced from the rotary member

by a predetermined distance. The material of the rotary member has a coefficient of thermal expansion that is smaller than that of the material of the fixed surface.

Another aspect of the present invention provides a motor including a rotary shaft and a bearing for radially supporting the rotary shaft, wherein the bearing includes a cylindrical rotary member connected to the rotary shaft and a cylindrical fixed surface surrounding the rotary member. The fixed surface is spaced from the rotary member by a predetermined distance. The rotary member is made of a material having a coefficient of thermal expansion that is $5 \times 10^{-6}/^{\circ}\text{C}$ or less.

A further aspect of the present invention provides a turbo-molecular pump including a housing, a stator vane attached to the housing, a rotor vane rotated relative to the stator vane, and a motor for driving the rotor vane. The motor includes a rotary shaft and a bearing for radially supporting the rotary shaft. The bearing includes a cylindrical rotary member connected to the rotary shaft and a cylindrical fixed surface surrounding the rotary member. The fixed surface is spaced from the rotary member by a predetermined distance. The material of the rotary member has a coefficient of thermal expansion that is smaller than that of the material of the fixed surface.

A further aspect of the present invention provides a turbo-molecular pump including a housing, a stator vane attached to the housing, a rotor vane rotated relative to the stator vane, and a motor for driving the rotor vane. The motor includes a rotary shaft and a bearing for radially supporting the rotary shaft. The bearing includes a cylindrical rotary member connected to the rotary shaft and

5 a cylindrical fixed surface surrounding the rotary member. The fixed surface is spaced from the rotary member by a predetermined distance. The rotary member is made of a material having a coefficient of thermal expansion that is $5 \times 10^{-6}/^{\circ}\text{C}$ or less.

10 A further aspect of the present invention provides a motor including a rotary shaft and a bearing for radially supporting the rotary shaft. The bearing includes a cylindrical rotary member connected to the rotary shaft and a cylindrical fixed surface surrounding the rotary member. The fixed surface is spaced from the rotary member by a predetermined distance. At least one of the rotary member and the fixed surface has a dynamic pressure groove formed on a predetermined first area defined on a surface opposing the other of the rotary member and the fixed surface. At least one of the rotary member and the fixed surface has a seal groove formed on a predetermined second area defined on a surface opposing the other one of the rotary member and the fixed surface. The seal groove is formed deeper than the dynamic pressure groove.

25 A further aspect of the present invention provides a turbo-molecular pump including a housing, a stator vane attached to the housing, a rotor vane rotated relative to the stator vane, and a motor for driving the rotor vane. The motor includes a rotary shaft and a bearing for radially supporting the rotary shaft. The bearing includes a cylindrical rotary member connected to the rotary shaft and a cylindrical fixed surface surrounding the rotary member. The fixed surface is spaced from the rotary member by a predetermined distance. At least one of the rotary member and the fixed surface has a dynamic pressure groove defined on a surface opposing the other of the rotary member and the

fixed surface. At least one of the rotary member and the fixed surface has a first seal groove formed on a surface opposing the other of the rotary member and the fixed surface. The first seal groove is formed deeper than the dynamic pressure groove.

Other aspects and advantages of the present invention will become apparent from the following description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention, together with objects and advantages thereof, may best be understood by reference to the following description of the presently preferred embodiments together with the accompanying drawings in which:

Fig. 1 is a cross-sectional view showing a turbo-molecular pump according to a first embodiment of the present invention;

Fig. 2 is a cross-sectional view showing a brushless motor of the turbo-molecular pump of Fig. 1;

Fig. 3 is a side view, partly in cross-section, showing an air bearing of the brushless motor of Fig. 2;

Fig. 4 is a graph showing the relationship between the size of the air bearing clearance and the temperature difference between a rotary cylinder and a fixed surface;

Fig. 5 is a graph showing the relationship between the size of an air bearing clearance and the temperature difference between a rotary cylinder and a fixed surface in

a turbo-molecular pump according to a second embodiment of the present invention;

5 Fig. 6A is a side view, partly in cross-section, showing an air bearing of a turbo-molecular pump according to a third embodiment of the present invention;

Fig. 6B is a diagram showing the depths of the grooves formed in the rotary cylinder of Fig. 6A;

Fig. 7 is a graph showing the relationship between the seal groove depth and the groove inlet pressure; and

Fig. 8 is a graph showing the relationship between the dynamic pressure groove depth and the natural frequency of the rotary cylinder.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A turbo-molecular pump 1 according to a first embodiment of the present invention will now be described with reference to Figs. 1 to 4.

20 As shown in Fig. 1, the turbo-molecular pump 1 has a housing 2 and a brushless motor 10. The housing 2 includes an upper housing 3, a lower housing 4, and an annular support block 5. The support block 5 is held between the upper and lower housings 3, 4. The upper housing 3, the support block 5, and the lower housing 4 are fastened together by a plurality of bolts 6.

25 An intake 3a, which is connected to a vacuum chamber (not shown), extends through the top end of the upper housing 3. Gas in the vacuum chamber is drawn into the motor 10 through the intake 3a. A plurality of supports 8

are attached to the inner wall of the upper housing 3. The supports 8 support a plurality of stator vanes 7, each of which extends inwardly from the upper housing 3. An annular support adapter 9 is fixed to the lower surface of the support block 5.

O-rings 11, 12 are fitted in the inner surfaces of the support block 5 and the support adapter 9, respectively. The motor 10 is supported by the support block 5 and the support adapter 9. The O-rings 11, 12 seal the space between the motor 10, the support block 5, and the support adapter 9. An intake region 18 is defined above the support block 5. A discharge region 19 is defined below the support block 5 and the support adapter 9.

The motor 10 has a rotary shaft 13, the upper end of which extends into the intake 3a. A cup-like wheel 14 is fastened to the upper end of the rotary shaft 13 by a nut 15. A plurality of rotor vanes 16 extend from the peripheral surface of the wheel 14. The rotor vanes 16 are each arranged in a gap formed between an associated pair of stator vanes 7. The motor 10 includes a motor case 17, which is spaced slightly from the inner cylindrical surface of the wheel 14.

An outer helical groove 17a extends along the outer surface of the motor case 17 and is opposed to the inner surface of the wheel 14. A plurality of air cooling slits 17b extend through part of the outer surface of the motor case 17 in the discharge region 19.

An air cooling fan unit 20 is attached to the lower housing 4. The fan unit 20 has a motor 21 and a fan 22, which is connected to the motor 21. The fan unit 20

produces an air current directed toward the slits 17b.

The structure of the brushless motor 10 will now be described.

As shown in Fig. 2, a pair of annular plugs 23, 24 are fitted into the ends of the motor case 17. An upper bore 23a extends through the center of the upper plug 23, and a lower bore 24a extends through the center of the lower plug 24. The bores 23a, 24a receive the rotary shaft 13.

A rotary element 25, which is fixed to the shaft 13, rotates integrally with the shaft 13. The rotary element 25 includes a field magnet 26, a pair of bushings 27a, 27b, a rotary tube, or cylinder 28, and a pair of rotary magnets 39, 40. The field magnet 26 has four permanent magnet plates (not shown). The four permanent magnet plates are parallel to one another and extend axially about the shaft 13. Further, the four permanent magnet plates are arranged to form a cylindrical shape. The polarity of each magnet plate differs from that of the adjacent magnet plates in an alternating manner. The rotary cylinder 28, or rotary member, covers the field magnet 26. The two bushings 27a, 27b seal the space between the rotary cylinder 28 and the shaft 13 and hold the field magnet 26 in between. The bushings 27a, 27b function to adjust the rotating balance of the rotary element 25.

A cylindrical fixed tube, or surface 29 is secured to the motor case 17 to cover the rotary element 25. The fixed surface 29 and the shaft 13 are coaxial. The inner surface of the fixed surface 29 is ground to improve its friction characteristics. The rotary cylinder 28 and the fixed surface 29 form an air bearing 30 that radially supports the

rotary shaft 13.

Three equally spaced armature coils 31 are arranged about the peripheral surface of the fixed surface 29. The angular dimension of each armature coil 31 is within a range of 90° to 120°. A cylindrical yoke 32 is secured to the inner surface of the motor case 17 to surround the armature coils 31.

Three magnetic sensors (Hall devices) 33 are arranged along the outer surface of the fixed surface 29 in correspondence with the three armature coils 31. The three armature coils 31 and the three magnetic sensors 33 are each connected to a plurality of connector pins 34 (only one shown in Fig. 2), which extend through the plug 24. The connector pins 34 are electrically connected to an external control circuit (not shown). The magnetic sensors 33 detect changes in the polarity of the field magnet 26. The control circuit detects the rotating speed based on the detection signal of the magnetic sensors 33 and controls the current provided to the armature coils 31 accordingly to control the rotating speed of the shaft 13.

A pair of magnetic bearings 37, 38 support the rotary shaft 13 in a non-contacting manner. The upper magnetic bearing 37 includes the upper rotary magnet 39 and an upper fixed magnet 41, which is fixed to the upper plug 23. The lower magnetic bearing 38 includes the lower rotary magnet 40 and a lower fixed magnet 42, which is fixed to the lower plug 24. The facing surfaces of the magnets 39, 41 have the same polarity. Thus, the magnets 39, 41 repel one another. Further, the facing surfaces of the magnets 40, 42 have the same polarity and the magnets 40, 42 repel one another. The magnets 39-42 are all made of the same material, preferably

from a neodymium magnet or a samarium magnet.

5 The rotary cylinder 28 and the fixed surface 29 are coaxial. A clearance having a predetermined radial distance C is provided between the rotary cylinder 28 and the fixed surface 29. The clearance distance C is predetermined in accordance with the capability of the motor 10 (e.g., the motor rotating speed). If the rotating speed of the motor 10 is in a range of 60,000rpm to 90,000rpm, the clearance distance C is 10 μ m or lower. If the rotating speed of the motor 10 is in a range of 50,000rpm to 70,000rpm, the clearance distance C is 3 μ m to 6 μ m. In the first embodiment, the clearance distance C is set to 5 μ m.

10
15 The rotary cylinder 28 and the fixed surface 29 are made of sintered ceramic. More specifically, the rotary cylinder 28 is made of silicon carbide, and the fixed surface 29 is made of alumina. The coefficient of thermal expansion of silicon carbide is 3 to 4 $\times 10^{-6}/^{\circ}\text{C}$. The coefficient of thermal expansion of alumina is 7 to 8 $\times 10^{-6}/^{\circ}\text{C}$. In other words, the coefficient of thermal expansion of the material used for the fixed surface 29 is greater than that of the material used for the rotary cylinder 28.

20
25 As shown in Fig. 3, an upper air bearing area 43a, a lower air bearing area 43b, and a gas seal area 44 are defined on the outer surface of the rotary cylinder 28. The gas seal area 44 is located closer to the upper end of the rotary cylinder 28 than the upper air bearing area 43a. A plurality of equally spaced V-shaped grooves (dynamic pressure grooves) 45a, 45b, which are arranged in a herringbone pattern, extend circumferentially along the upper and lower air bearing areas 43a, 43b, respectively. A helical groove (seal groove) 46 extends along the gas seal

area 44. An annular groove 47a extends between the upper air bearing area 43a and the gas seal area 44, and an annular groove 47b extends between the upper and lower air bearing areas 43a, 43b.

5 Referring to Figs. 2 and 3, a plurality of apertures 48 extend through the fixed surface 29 at locations corresponding to the annular grooves 47a, 48a. When the motor 10 is driven, the V-shaped grooves 45a, 45b function to draw the air outside the fixed surface 29 through the
10 apertures 48 and toward the outer surface of the rotary cylinder 28. As the rotating speed of the rotary element 25 increases, the amount of air drawn into the clearance between the rotary cylinder 28 and the fixed surface 29 increases thereby forming compressed gas layers. The
15 compressed gas layers prevent the rotary element 25 from contacting the fixed surface 29 during rotation.

As the motor 10 drives the rotary shaft 13 and rotates the wheel 14, the air in the intake 3a is drawn into the space between the rotor vanes 16 and the stator vanes 7.
20 The air is drawn into the outer helical groove 17a of the motor case 17 and into the space between the rotary shaft 13 and the motor case 17. Then, the air flows through the inner helical groove 46 and the apertures 48 into a gap 36 formed between the fixed surface 29 and the motor case 17.
25 The air is then released into the discharge region 19 through the slits 17b. The released air is discharged through vent holes 4a formed in the lower housing 4. As the air passes through the outer helical groove 17a and the inner helical groove 46, the velocity of the air increases
30 significantly. The velocity change increases the fluid drawing effect. The outer helical groove 17a and the inner helical groove 46 extend in a direction corresponding to the

rotation direction. Thus, the flow of air in the grooves 17a, 46 is restricted to one direction. This prevents reversed air flow in the grooves 17a, 46 and increases the depressurization capability of the pump 1.

5 When the motor 10 is driven, the V-shaped grooves 45a, 45b function to form a high-pressure compressed gas layer at the axially middle portion of each air bearing area 43a, 43b. The compressed gas layer causes the rotary element 25 to float away from the inner surface of the fixed surface 29 when the rotating speed approaches 5000rpm. In this state, the rotary shaft 13 (the rotary element 25) is radially supported by the air bearing 30.

10
15
20
25 When a certain amount of time elapses after the motor 10 reaches a normal rotating speed, the viscous friction of air heats the rotary cylinder 28 and the fixed surface 29. In this state, the air current produced by the fan unit 20 passes through the slits 17b and toward the fixed surface 29, which cools the fixed surface 29 with forced air. Hence, the temperature increase of the fixed surface 29 is relatively small. The rotary cylinder 28 is not cooled with forced air. Hence, the temperature increase of the rotary cylinder 28 is relatively large. Accordingly, when the pump 1 is operated, the temperature difference between the rotary cylinder 28 and the fixed surface 29 reaches approximately 80°C to 100°C.

30 However, the coefficient of thermal expansion of the rotary cylinder 28 is smaller than that of the fixed surface 29. Accordingly, the change in the outer diameter of the rotary cylinder 28 is about the same or slightly greater than that of the inner diameter of the fixed surface 29. Thus, the temperature-related change in the distance C

between the fixed surface 29 and the rotary cylinder 28 is small.

Fig. 4 is a graph showing the relationship between the clearance distance C (μm) and the temperature difference ΔT ($^{\circ}\text{C}$) between the rotary cylinder 28 and the fixed surface 29. In the graph, the black squares represent points in the relationship when the rotary cylinder 28 is made of silicon carbide and the fixed surface 29 is made of alumina, as in the first embodiment. The black diamonds represent points in the relationship when the rotary cylinder 28 and the fixed surface 29 are both made of alumina. The relationship indicated by the black diamonds is referred to as a comparative example. The maximum temperature difference between the rotary cylinder 28 and the fixed surface 29 in the operation range is represented by ΔT_{max} . The initial clearance distance C is, for example, 3 to $6\mu\text{m}$. If the rotary shaft 13 is rotated at 50,000 to 70,000 rpm, ΔT_{max} is about 80 to 120°C .

It is apparent from the graph of Fig. 4 that the decrease in the clearance distance C , which is caused by changes in the temperature, is smaller when the coefficient of thermal expansion of the material of the rotary cylinder 28 is smaller than that of the fixed surface 29.

The coefficient of thermal expansion of the rotary cylinder and the fixed surface in the comparative example is 7 to $8 \times 10^{-6}/^{\circ}\text{C}$. The coefficient of thermal expansion of the rotary cylinder is thus relatively large, and the difference between the coefficient of thermal expansion of the rotary cylinder and that of the fixed surface is null. Therefore, in the comparative example, the clearance is eliminated before the temperature difference ΔT reaches the maximum

temperature difference ΔT_{\max} .

In comparison, in the first embodiment, the coefficient of thermal expansion of the material of the rotary cylinder 28 is 3 to $4 \times 10^{-6}/^{\circ}\text{C}$, whereas the coefficient of thermal expansion of the material of the fixed surface 29 is 7 to $8 \times 10^{-6}/^{\circ}\text{C}$. The coefficient of thermal expansion of the rotary cylinder 28 is relatively small, and the difference between the two coefficients of thermal expansion is about $4 \times 10^{-6}/^{\circ}\text{C}$. Thus, the reduction of the clearance distance C caused by changes in the temperature is smaller than that of the comparative example. As a result, the clearance is not eliminated when the temperature difference ΔT reaches the maximum temperature difference ΔT_{\max} . Accordingly, contact between the rotary cylinder 28 and the fixed surface 29 is prevented regardless of continuous high speeds, and a further increase in the rotating speed is possible even if the initial value of the clearance distance C is 3-6 μm .

The desired effect is achieved as long as a ceramic having a low coefficient of thermal expansion of $5 \times 10^{-6}/^{\circ}\text{C}$ or less is used as the material of the rotary cylinder. The desired effect is guaranteed to take place when the coefficient of thermal expansion is $4 \times 10^{-6}/^{\circ}\text{C}$ or less. As long as the difference in the coefficients of thermal expansion between the rotary cylinder 28 and the fixed surface 29 is $1 \times 10^{-6}/^{\circ}\text{C}$ or more, the desired effect is obtained. The desired effect is guaranteed to take place when the difference between the coefficients of thermal expansion is $2 \times 10^{-6}/^{\circ}\text{C}$ or more.

For example, since the coefficient of thermal expansion of zirconia is 7 to $8 \times 10^{-6}/^{\circ}\text{C}$ and close to that of alumina, zirconia may be used as the material of the fixed surface

29.

The coefficient of thermal expansion of silicon nitride is $3 \text{ to } 4 \times 10^{-6}/^{\circ}\text{C}$ and close to that of silicon carbide. Thus, silicon nitride may be used as the material of the rotary cylinder 28.

By using silicon carbide or silicon nitride as the material of the rotary cylinder 28, heat dissipation of the rotary cylinder 28 is improved since the coefficient of thermal conductivity of the rotary cylinder 28 is relatively high.

The first embodiment has the advantages described below.

The rotary cylinder 28 is formed from a ceramic material having a coefficient of thermal expansion that is smaller than that of the fixed surface 29. Thus, the clearance may be set at a relatively small value of several micrometers. Accordingly, the motor 10 and the turbo-molecular pump 1 can be made smaller and can be operated at higher speeds.

Since the clearance is small, the turbo-molecular pump 1 achieves a higher degree of vacuum at high rotating speeds.

An oxide ceramic such as alumina or zirconia is used as the material of the fixed surface 29. Thus, the machining and manufacturing of the air bearing 30 is relatively simple, which reduces cost.

The rotary cylinder 28 is made of silicon carbide or

silicon nitride. Thus, the coefficient of thermal expansion of the rotary cylinder 28 is small and heat is easily dissipated. This reduces the temperature of the rotary cylinder 28 and limits the reduction of the clearance distance C. Accordingly, the motor 10 can be operated at higher rotating speeds.

The O-rings 11, 12, which are made of rubber, elastically connect the motor 10 to the housing 2. This absorbs the vibrations of the motor 10 that would otherwise be transmitted to the housing 2.

A turbo-molecular pump according to the present invention will now be described. In the second embodiment, the material of the rotary cylinder 28 differs from that of the fixed surface 29. The rotary cylinder 28 is made of silicon carbide, and the fixed surface 29 is made of silicon nitride. The coefficient of thermal expansion of the rotary cylinder 28 is $3 \text{ to } 4 \times 10^{-6}/^{\circ}\text{C}$, which is about the same as that of the fixed surface 29.

Fig. 5 is a graph showing the relationship between the clearance distance C (μm) and the temperature difference ΔT ($^{\circ}\text{C}$) between the rotary cylinder 28 and the fixed surface 29. The black circles represent points in the relationship when the rotary cylinder 28 is made of silicon carbide and the fixed surface 29 is made of silicon nitride. In other words, the circles represent the second embodiment. As shown in Fig. 5, the reduction in the clearance distance C that is caused by changes in the temperature is smaller than that of the comparative example. In the second embodiment, the difference between the coefficients of thermal expansion of the materials used for the rotary cylinder 28 and the fixed surface 29 is substantially null. However, the

coefficient of thermal expansion of the rotary cylinder 28 is 3 to $4 \times 10^{-6}/^{\circ}\text{C}$ and relatively small. Thus, the clearance is not eliminated when the temperature difference ΔT reaches the maximum temperature difference ΔT_{max} . Accordingly, contact between the rotary cylinder 28 and the fixed surface 29 is prevented at continuous high speeds and a further increase in the rotating speed is possible.

In the second embodiment, the material combination of the rotary cylinder 28 and the fixed surface 29 may be changed to silicon carbide and silicon carbide, silicon nitride and silicon nitride, or silicon nitride and silicon carbide, respectively. These material combinations also achieve the necessary clearance and permit high speed rotation without contact between the rotary cylinder 28 and the fixed surface 29.

When the coefficients of thermal expansion of the rotary cylinder 28 and the fixed surface 29 are substantially the same, the desired effect is achieved if the material of the rotary cylinder 28 has a coefficient of thermal expansion of $5 \times 10^{-6}/^{\circ}\text{C}$ or lower. The desired effect is further guaranteed if the material has a coefficient of thermal expansion of $4 \times 10^{-6}/^{\circ}\text{C}$ or lower.

The materials used for the rotary cylinder 28 and the fixed surface 29 are carbides or nitrides, which have coefficients of thermal conductivity that are higher than those of oxides. The rotary cylinder 28 and the fixed surface 29 thus have improved heat dissipation and avoid contact.

A turbo-molecular pump according to a third embodiment of the present invention will now be described with

reference to Figs. 6A to 8.

As shown in Fig. 6B, like the first embodiment, there are V-shaped grooves 45a, 45b, a helical groove 46, and annular grooves 47a, 47b in the rotary cylinder 28. The depth of each type of groove differs from that of the other types. Fig. 7 is a graph showing the relationship between the depth of the helical groove 46 and the pressure at the inlet of the groove (Pa). The groove inlet pressure is the pressure that acts on the upper end (right side as viewed in Fig. 6A) of the helical groove 46. It is preferred that the value of the groove inlet pressure be as small as possible. More specifically, it is preferred that the groove inlet pressure be 10^2 Pa or lower. The lower end of the helical groove 46 is exposed to the compressed air layer. Thus, it is required that the helical groove 46 (gas seal area 44) function as an air seal under a pressure difference of 10^2 Pa or more.

As apparent from Fig. 7, the seal effect of the gas seal area 44 depends on the depth of the helical groove 46. The desired seal is obtained when the depth of the helical groove 46 is two to ten times the clearance distance C. To obtain a high sealing effect, the preferred depth of the helical groove 46 is four to eight times the clearance distance C.

The relationship between the depth of the V-shaped grooves 45a, 45b and the natural frequency of the rotary element 25 will now be described. The motor 10 is used within a range of about 60,000 to 90,000rpm. Accordingly, the rotating speed, or frequency, of the rotary element 25 during operation is 1,000 to 1,500rps (Hz). To avoid resonance, the value of the natural frequency of the rotary

element 25 (in Hz) must differ greatly from the operation speed (in RPS).

As apparent from Fig. 8, the natural frequency of the rotary element 25 decreases as the depth of the V-shaped grooves 45a, 45b increases. When the depth of the V-shaped grooves 45a, 45b is one to five times the clearance distance C, the natural frequency is not included in the operation speed range. If the depth of the V-shaped grooves 45a, 45b is 6C, the natural frequency of the rotary element 25 approaches the operation speed range (about 1000 to 1500Hz). In such state, resonance is apt to occur and smooth rotation of the rotary shaft 13 may be hindered. Accordingly, the preferred depth of the V-shaped grooves 45a, 45b is one to five times the clearance distance C.

To smoothly draw air through the apertures 48 and into the clearance, the depth of the annular grooves 47a, 47b must not exceed a value that is two times the depth of the V-shaped grooves 45.

The depth of the annular grooves 47a, 47b is required to exceed two times the depth of the V-shaped grooves 45a, 45b. Thus, to facilitate manufacture, it is preferred that the clearance distance C be three to fifteen times the depth of the V-shaped grooves 45a, 45b. The manufacture of the rotary cylinder 28 is especially facilitated when the depth of the annular grooves 47a, 47b is equal to the sum of the depth of the V-shaped grooves 45a, 45b and the depth of the helical groove 46.

When the depth of the V-shaped grooves 45a, 45b is represented by A_{PS} , the depth of the annular grooves 47a, 47b by A_R , and the depth of the helical groove 46 by A_{GS} , the

range of each value is $A_{PS}=1\times C$ to $5\times C$, $A_{GS}=2\times C$ to $10\times C$, and $A_R=3\times C$ to $15\times C$. It is especially effective if A_{GS} equals $4\times C$ to $8\times C$. It is preferred that the depth combination satisfy the relationship of $A_R=A_{PS}+A_{GS}$. The preferred clearance distance C is about ten micrometers or less.

The third embodiment has the advantages described below.

When the motor 10 is driven, the V-shaped grooves 45a, 45b function to form a high-pressure compressed gas layer with the air drawn in through the apertures 48 at the axially middle portion of each air bearing area 43a, 43b. The depth of the annular grooves 47 is set at $A_R=3C$ to $15C$. During rotation, air flows smoothly from the apertures 48 to the clearance. Thus, the compressed gas layer is readily formed. When the rotating speed approaches 5,000rpm, the compressed gas layers cause the rotary element 25 to float away from the inner surface of the fixed surface 29. That is, the rotary element 25 is supported by the air bearing 30.

The depth of the V-shaped grooves 45a, 45b is set at $A_{PS}=1C$ to $5C$. Thus, the natural frequency of the rotary element 25 differs greatly from the operation speed range and prevents the rotary element 25 from resonating. Accordingly, satisfactory bearing characteristics are obtained. Further, the rotary shaft 13 is stable in the operation speed range.

The depth of the helical grooves 46 is set at $A_{GS}=2C$ to $10C$. Thus, a high vacuum degree of 10^2Pa or lower is guaranteed. If the condition of $A_{GS}=4C$ to $8C$ is satisfied, a vacuum degree of $10Pa$ or lower is obtained.

5 In the first embodiment, the ceramic material of the rotary cylinder 28 and the ceramic material of the fixed surface 29 is not limited to materials in which the difference in the coefficients of thermal expansion is equal to or greater than a predetermined value. As long as the coefficient of thermal expansion of the material of the rotary cylinder 28 is $5 \times 10^{-6}/^{\circ}\text{C}$ or lower, a material combination having a small difference in the coefficients of thermal expansion also maintains the clearance of the air bearing 30 in the operation speed range.

15 In the third embodiment, due to the anti-wear characteristics and heat characteristics, ceramic is preferred as the material for the rotary cylinder 28 and the fixed surface 29. However, at least one of the rotary cylinder 28 and the fixed surface 29 may be made of plastic as long as the material has the necessary anti-wear and heat characteristics. Further, the material of the rotary cylinder 28 and the material of the fixed surface 29 may either be the same or different.

20 In the first and second embodiments, a ceramic oxide, such as mullite or zircon, which resist wear, may be used as the material of the fixed surface 29.

25 In the first and second embodiments, cordierite, which is an oxide having a low coefficient of thermal expansion, may be used as the material of the rotary cylinder 28.

In the first and second embodiments, a static air bearing may be employed as the air bearing 30.

In the first and second embodiments, an air bearing may be employed in lieu of the magnetic bearings 37, 38, which

support the rotary shaft.

In the first and second embodiments, the outer helical groove 17a may be eliminated.

5 In the third embodiment, the depth of the annular grooves 47a, 47b is not limited to the sum of the depth of the V-shaped grooves 45a, 45b and the depth of the helical groove 46. As long as the annular grooves 47a, 47b have a depth that is two times the depth of the V-shaped grooves 45a, 45b, a sufficient amount of air is provided to the clearance and a high-pressure compressed gas layer is formed.

10 In the third embodiment, the depth of the annular grooves 47a, 47b may be changed as required. However, if the depths of the V-shaped grooves 45a, 45b and the helical groove 46 is set in the same manner as the third embodiment, the seal and bearing characteristics are improved.

15 In the first to third embodiments, at least one of the dynamic pressure grooves 45a, 45b and the helical groove 46 may be formed on the inner surface of the fixed surface 29.

20 In the first to third embodiments, the motor 10 may be applied to an apparatus other than the turbo-molecular pump 1, for example, a compressor.

25 In the first to third embodiments, the helical grooves 17a, 46 extend in a direction corresponding to the rotating direction of the motor 10. However, if, for example, the motor 10 is employed in a compressor, the helical grooves 17a, 46 may extend in the opposite direction.

The present examples and embodiments are to be

WHAT IS CLAIMED IS:

1. A motor comprising:
a rotary shaft; and
a bearing for radially supporting the rotary shaft,
wherein the bearing includes:
a cylindrical rotary member connected to the
rotary shaft; and
a cylindrical fixed surface surrounding the rotary
member, wherein the fixed surface is spaced from the
rotary member by a predetermined distance, and wherein
the material of the rotary member has a coefficient of
thermal expansion that is smaller than that of the
material of the fixed surface.
2. The motor according to claim 1, wherein the difference
between the coefficient of thermal expansion of the material
of the fixed surface and the coefficient of thermal
expansion of the material of the rotary member is $1 \times 10^{-6}/^{\circ}\text{C}$
or more.
3. The motor according to claim 1, wherein the material of
the rotary member has a coefficient of thermal expansion
that is $5 \times 10^{-6}/^{\circ}\text{C}$ or less.
4. The motor according to claim 3, wherein the fixed
surface is made of a ceramic oxide material.
5. The motor according to claim 4, wherein the fixed
surface is made of alumina or zirconia.
6. The motor according to claim 3, wherein the rotary
member is made of a ceramic carbide material or a ceramic
nitride material.

7. The motor according to claim 6, wherein the rotary member is made of silicon carbide or silicon nitride.

8. The motor according to claim 1, further comprising a case for accommodating the bearing, the rotary member, and the fixed surface, wherein the case has a slit.

9. A motor comprising:
a rotary shaft; and
a bearing for radially supporting the rotary shaft,
wherein the bearing includes:

a cylindrical rotary member connected to the rotary shaft; and

a cylindrical fixed surface surrounding the rotary member, wherein the fixed surface is spaced from the rotary member by a predetermined distance, and wherein the rotary member is made of a material having a coefficient of thermal expansion that is $5 \times 10^{-6}/^{\circ}\text{C}$ or less.

10. The motor according to claim 9, wherein the rotary member is made of a ceramic carbide material or a ceramic nitride material.

11. The motor according to claim 10, wherein the rotary member is made of silicon carbide or silicon nitride.

12. The motor according to claim 9, further comprising a case for accommodating the bearing, the rotary member, and the fixed surface, wherein the case has a slit.

13. A turbo-molecular pump comprising:
a housing;
a stator vane attached to the housing;

005270" E86E6760

a rotor vane rotated relative to the stator vane; and
a motor for driving the rotor vane, wherein the motor
includes:

5 a rotary shaft; and
a bearing for radially supporting the rotary
shaft, wherein the bearing includes:

a cylindrical rotary member connected to the
rotary shaft; and

10 a cylindrical fixed surface surrounding the
rotary member, wherein the fixed surface is spaced
from the rotary member by a predetermined
distance, and wherein the material of the rotary
member has a coefficient of thermal expansion that
is smaller than that of the material of the fixed
surface.

15 14. The pump according to claim 13, further comprising a
device for cooling the motor.

15. A turbo-molecular pump comprising:

a housing;

20 a stator vane attached to the housing;

a rotor vane rotated relative to the stator vane; and

a motor for driving the rotor vane, wherein the motor

includes:

25 a rotary shaft; and

a bearing for radially supporting the rotary
shaft, wherein the bearing includes:

a cylindrical rotary member connected to the
rotary shaft; and

30 a cylindrical fixed surface surrounding the
rotary member, wherein the fixed surface is spaced
from the rotary member by a predetermined
distance, and wherein the rotary member is made of

a material having a coefficient of thermal expansion that is $5 \times 10^{-6}/^{\circ}\text{C}$ or less.

16. The pump according to claim 15, further comprising a device for cooling the motor.

5 17. A motor comprising:

a rotary shaft; and

a bearing for radially supporting the rotary shaft,

wherein the bearing includes:

10 a cylindrical rotary member connected to the rotary shaft; and

15 a cylindrical fixed surface surrounding the rotary member, wherein the fixed surface is spaced from the rotary member by a predetermined distance, wherein at least one of the rotary member and the fixed surface has a dynamic pressure groove formed on a predetermined first area defined on a surface opposing the other of the rotary member and the fixed surface, and wherein at least one of the rotary member and the fixed surface has a seal groove formed on a predetermined second area defined on a surface opposing the other one of the rotary member and the fixed surface, the seal groove being formed deeper than the dynamic pressure groove.

20 18. The motor according to claim 17, wherein the depth of the seal groove is within a range of two to ten times the predetermined distance.

25 19. The motor according to claim 18, wherein the depth of the dynamic pressure groove is within a range of one to five times the predetermined distance.

20. The motor according to claim 17, wherein at least one

of the rotary member and the fixed surface has an annular groove formed between the first predetermined area and the second predetermined area, wherein the annular groove is deeper than the seal groove.

5 21. The motor according to claim 20, wherein the depth of the annular groove is within a range of three to fifteen times the predetermined distance.

10 22. The motor according to claim 20, wherein the depth of the annular groove is substantially equal to the depth of the seal groove and the depth of the dynamic pressure groove.

23. The motor according to claim 17, wherein the seal groove is helical.

15 24. A turbo-molecular pump comprising:
a housing;
a stator vane attached to the housing;
a rotor vane rotated relative to the stator vane; and
a motor for driving the rotor vane, wherein the motor includes:

20 a rotary shaft; and
a bearing for radially supporting the rotary shaft, wherein the bearing includes:

a cylindrical rotary member connected to the rotary shaft; and

25 a cylindrical fixed surface surrounding the rotary member, wherein the fixed surface is spaced from the rotary member by a predetermined distance, wherein at least one of the rotary member and the fixed surface has a dynamic pressure groove defined on a surface opposing the

30

other of the rotary member and the fixed surface,
and wherein at least one of the rotary member and
the fixed surface has a first seal groove formed
on a surface opposing the other of the rotary
member and the fixed surface, the first seal
groove being formed deeper than the dynamic
pressure groove.

25. The pump according to claim 24, wherein the motor
includes a generally cylindrical case, wherein the pump
further comprises a cup-like wheel coupled to a distal end
of the rotary shaft to cover the case and support the rotor
vane, the wheel having an inner cylindrical surface that is
separated from an outer cylindrical of the case during
operation of the motor, and wherein at least one of the
wheel and the case has a second seal groove formed on a
surface opposing the other of the wheel and the case.

26. The pump according to claim 25, wherein the second seal
groove is helical.

27. The pump according to claim 24, wherein the motor is
elastically supported by the housing via an elastic member.

ABSTRACT OF THE DISCLOSURE

5 A compact turbo-molecular pump having a high
depressurizing capability. A motor for rotating a rotor
vane includes an air bearing. The air bearing has a rotary
cylinder and a fixed surface surrounding the rotary
cylinder. The material of the rotary cylinder has a
coefficient of thermal expansion that is smaller than that
of the material of the fixed surface. Thus, change in the
dimensions of the rotary cylinder is smaller than that of
the fixed surface even if the temperature of the air bearing
rises during operation of the pump. Thus, the rotary
cylinder avoids contact with the fixed surface.

003210" E86E6760 10
CERTIFICATE UNDER 37 CFR 119: The
undersigned hereby certifies that this paper
or papers, as described hereinabove, are
being deposited in the United States Postal
Service, "Express Mail Post Office to
Addressee" having an Express Mail Mailing
label number of:

EL531629832US

In an envelope addressed to:
Assistant Commissioner for Patents
Washington, DC 20231

on this 28th day of January, 2000
Crompton, Seager & Tufte, LLC

By: Kathleen L. Boekling

Fig.1

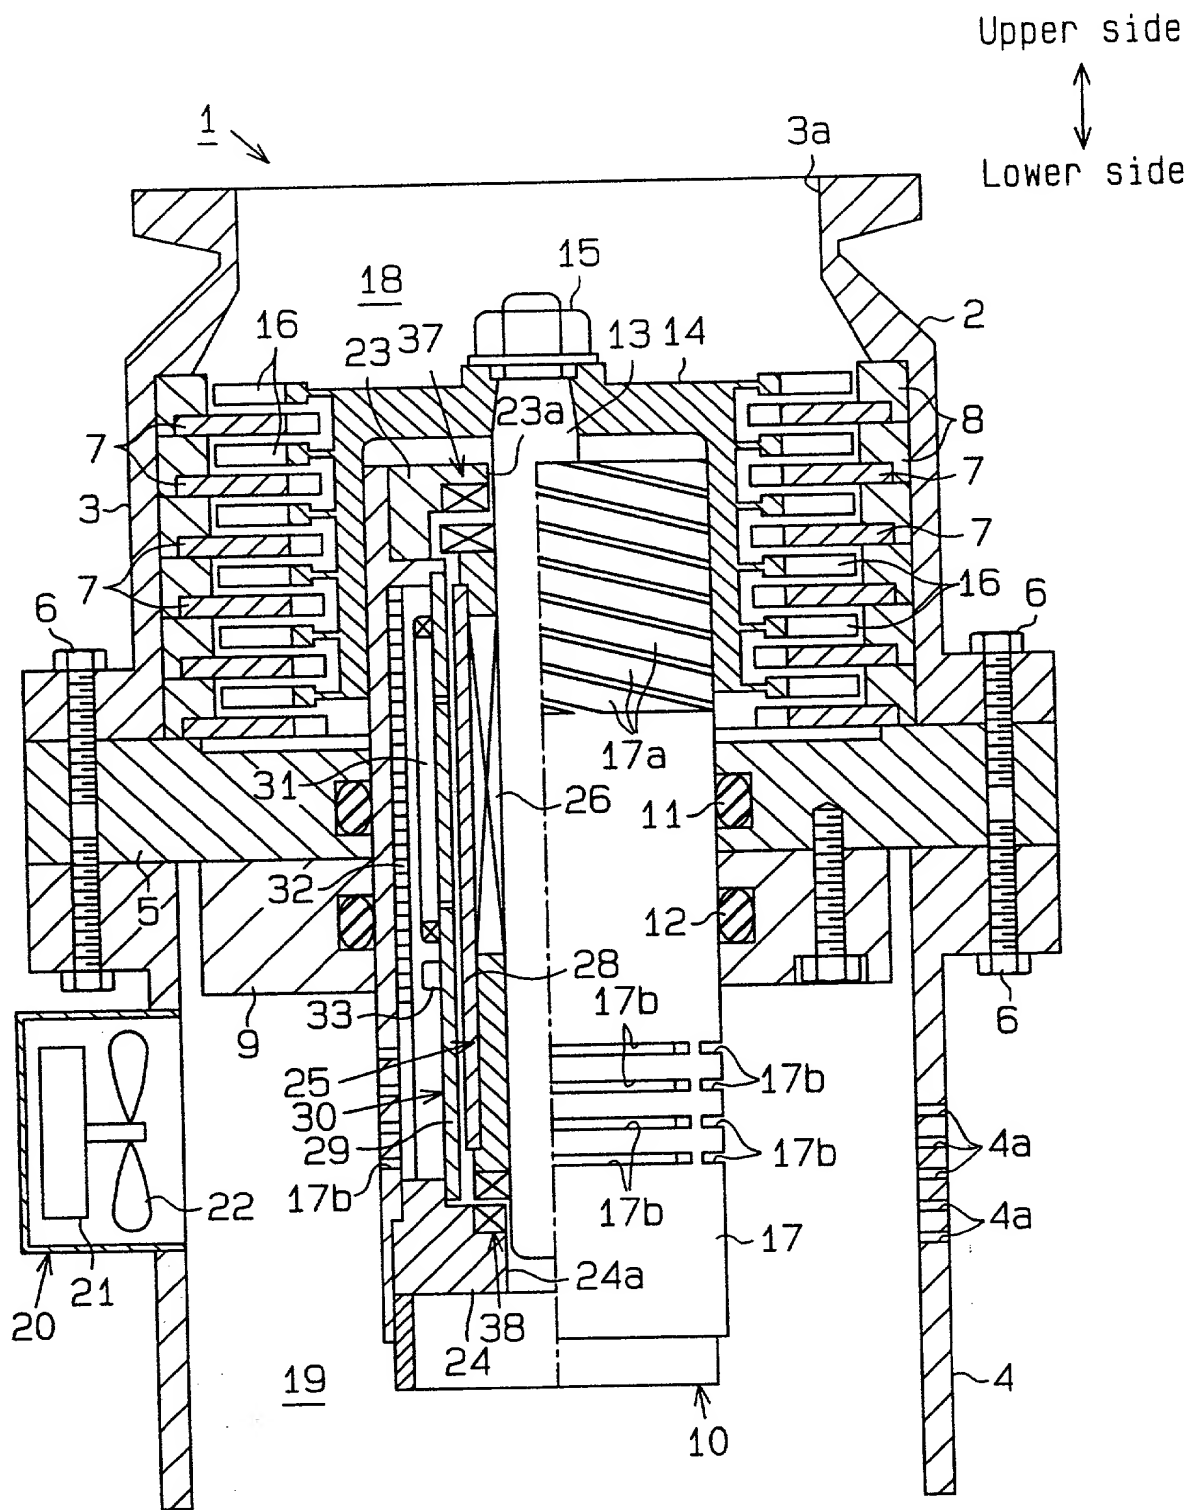


Fig. 2

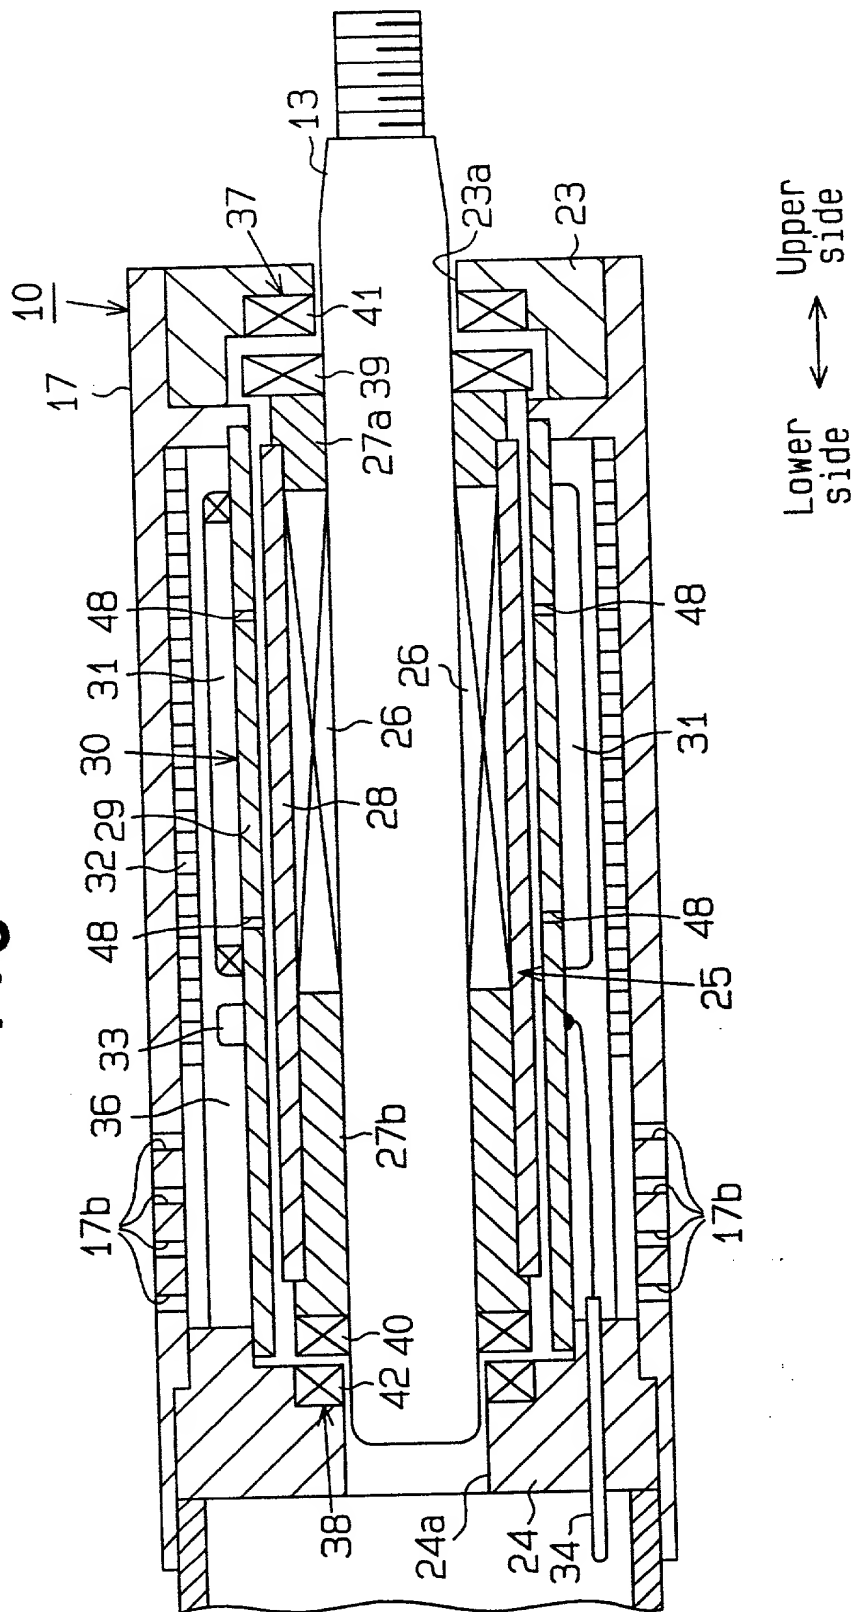


Fig. 3

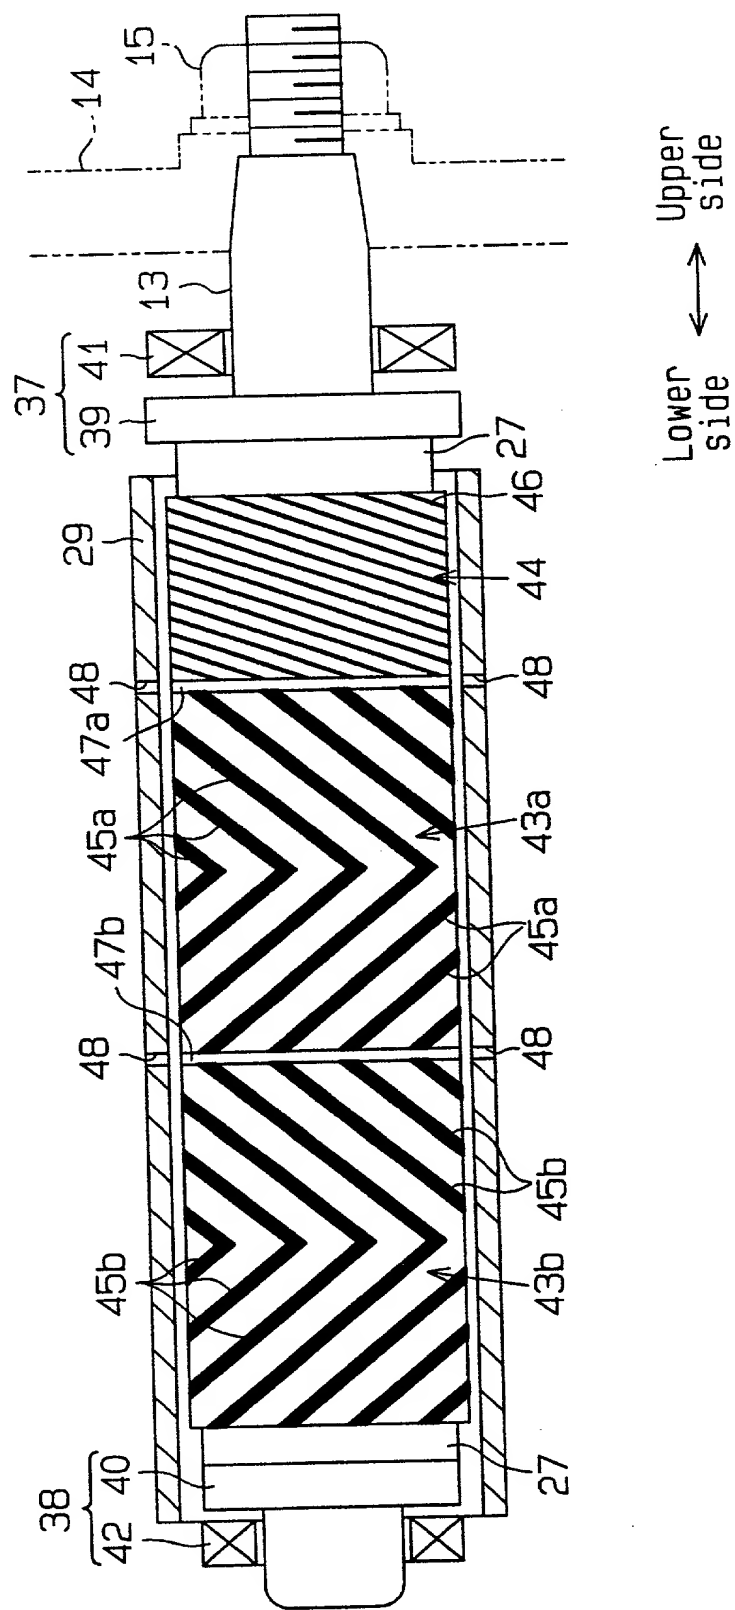


Fig.4

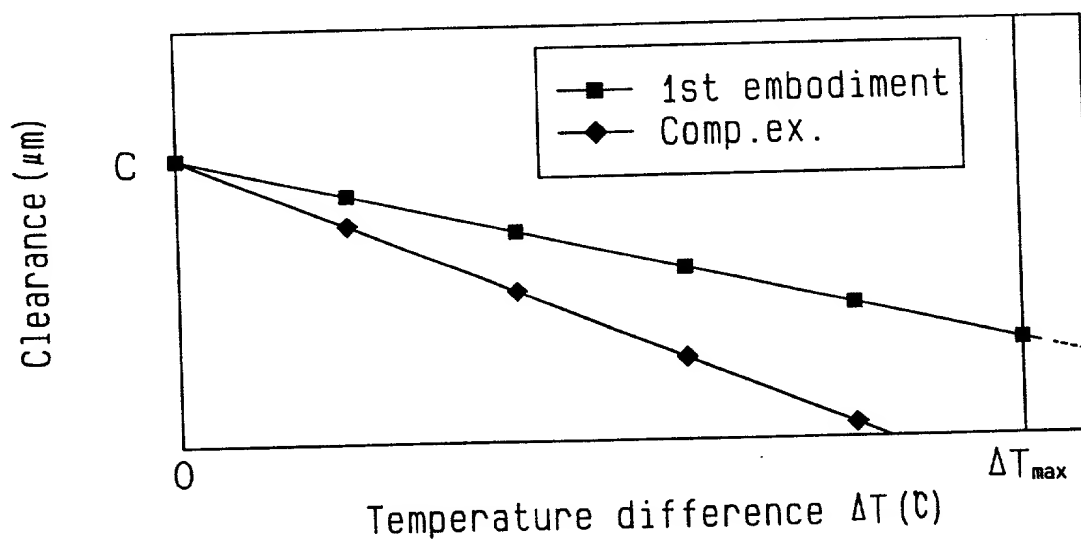


Fig.5

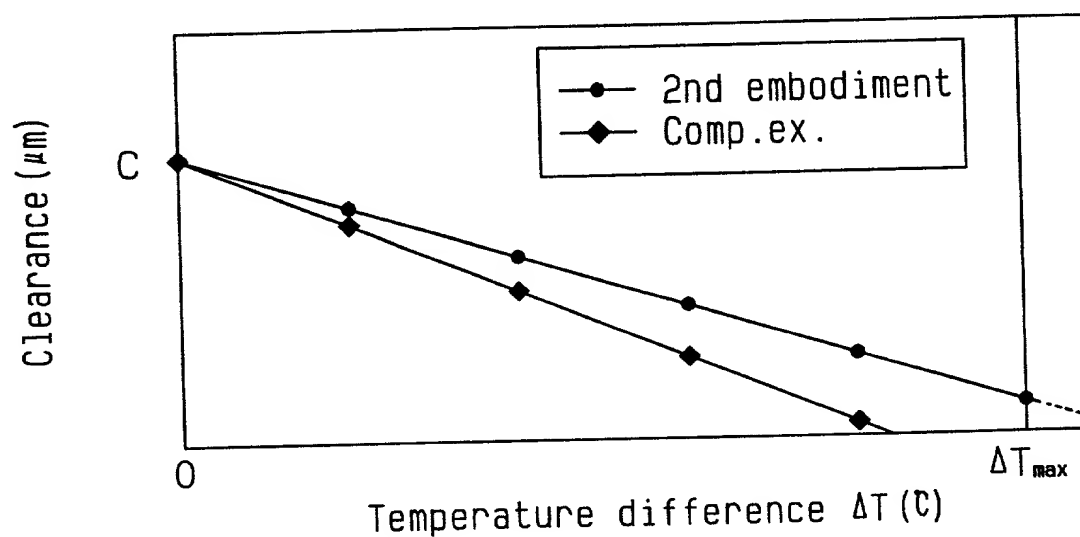


Fig.7


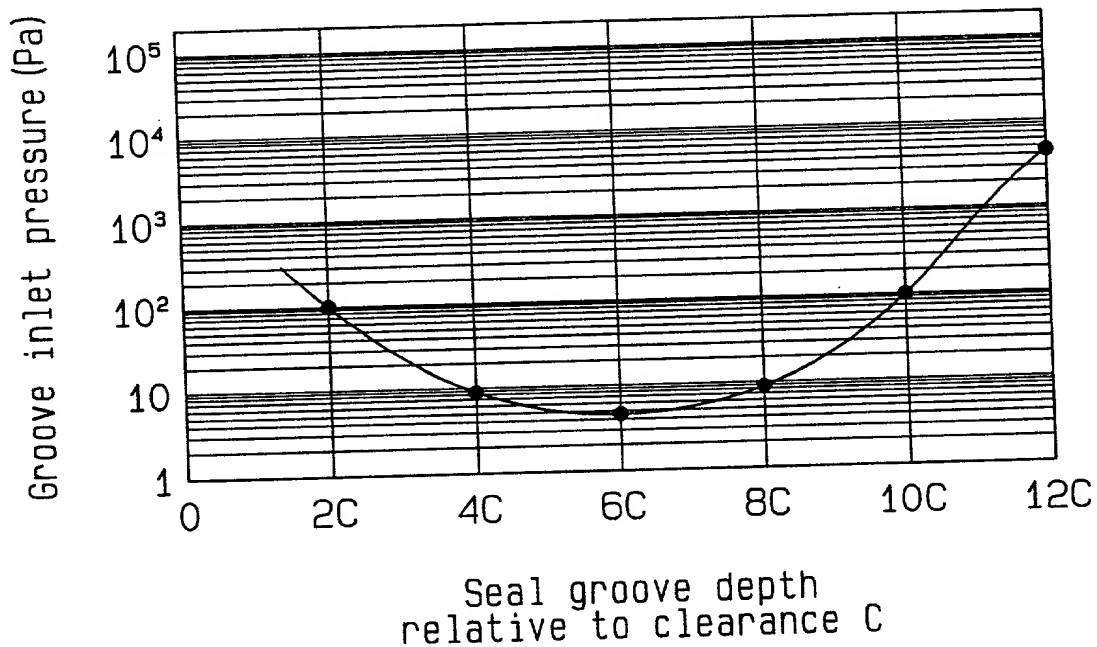


Fig.8

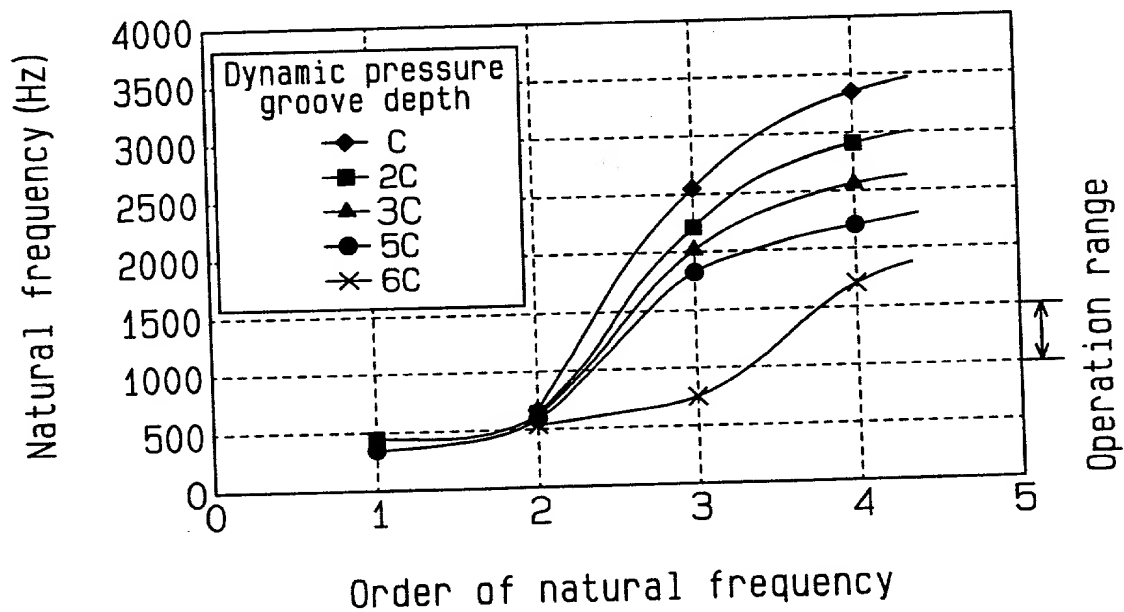

COMBINED DECLARATION/POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled MOTOR AND TURBO-MOLECULAR PUMP, the specification of which (check one):

☒ is attached hereto

☐ was filed on
as U.S. Application
Serial No.

☐ and was amended on (if
applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefit(s) under Title 35, United States Code §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Prior Foreign Application(s)

Number	:	11-022012
Country	:	Japan
Day/Month/Year Filed	:	29/01/99
Priority (yes/no)	:	yes

Number	:	11-028383
Country	:	Japan
Day/Month/Year Filed	:	05/02/99
Priority (yes/no)	:	yes

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) as listed below:

Provisional Application No. :
Filing Date :

Provisional Application No. :
Filing Date :

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international applications designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information that is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 and that which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No. :
Filing Date :
Status (patented, pending, abandoned) :

Application Serial No. :
Filing Date :
Status (patented, pending, abandoned) :

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

David M. Crompton, Reg. No. 36,772;
Glenn M. Seager, Reg. No. 36,926;
Brian N. Tufte, Reg. No. 38,638;
Craig F. Taylor, Reg. No. 40,199;
Robert E. Atkinson, Reg. No. 36,433;
Michael A. Kondzella, Reg. No. 18,013;
Thomas L. McMasters, Reg. No. P45,593; and
Allen W. Groenke, Reg. No. 42,608.

Send correspondence to:

David M. Crompton
CROMPTON, SEAGER & TUFTE, LLC
331 Second Avenue South, Suite 895
Minneapolis, Minnesota 55401-2246
(612) 677-9050

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon, I further declare that I understand the content of this declaration.

Full name of sole or first inventor: Hirokazu Yashiro
Residence: % Ibiden Co., Ltd., 1-1, Kitagata, Ibigawa-cho, Ibi-gun, Gifu-ken 501-0695 Japan
Citizenship: Japanese
Post Office Address: % Ibiden Co., Ltd., 1-1, Kitagata, Ibigawa-cho, Ibi-gun, Gifu-ken 501-0695
Japan

Inventor's Signature _____ Date _____

Full name of second or joint inventor: Youichi Kuwayama
Residence: % Ibiden Co., Ltd., 1-1, Kitagata, Ibigawa-cho, Ibi-gun, Gifu-ken 501-0695 Japan
Citizenship: Japanese
Post Office Address: % Ibiden Co., Ltd., 1-1, Kitagata, Ibigawa-cho, Ibi-gun, Gifu-ken 501-0695
Japan

Inventor's Signature _____ Date _____

1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

- (i) Opposing an argument of unpatentability relied on by the Office, or
- (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application:

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.